



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101444

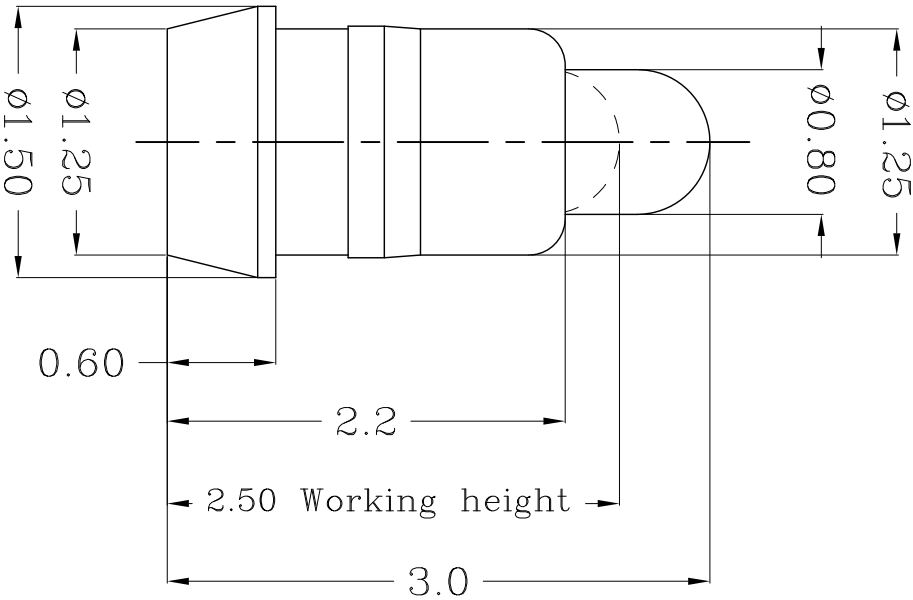

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
- 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 1) Force: $70 \pm 20\text{gf}$ per pin at 0.5mm stroke (力: 下压0.5mm 的力: $70 \pm 20\text{gf}$)
- 2) Total stroke(总行程) : 0.70mm
- 3) Durability(寿命): 10,000 cycle min.
- 1) Electrical(电性能)
- 1) Contact resistance(接触抵抗): 30mOhm Max.
- 2) Voltage rating(额定电压): 36V DC Max
- 3) Current rating(额定电流): 2.0A

TOP-LINK

USED DN
—

101444-1
PART NUMBER

DIMENSIONS IN MM				MATERIAL		HT TR		FIN	
TOLERANCES UNLESS OTHER SPECIFIED				△					✓
0	= ±	—		DWN	APVD	—			
0.0	= ±0.10			CHK	REL				
0.00	= ± 0.05								
0.000	= ±								
ANGLE: ±1°				NAME					
SURF. TEXTURE: 32/				PGGD PIN					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				PG-1.5-0.6-1.25-2.2-3.0					
DO NOT SCALE PRINT				SCALE	1:1	A4	DWG NO.	C-101444	

Top-Link
Electronics Ltd.

LDC
—
DIST
—

NEW		2010/06/29
REVISION RECORD	APVD	DATE
L TR		

4

3

2

1