


DWN No.:
C-101633

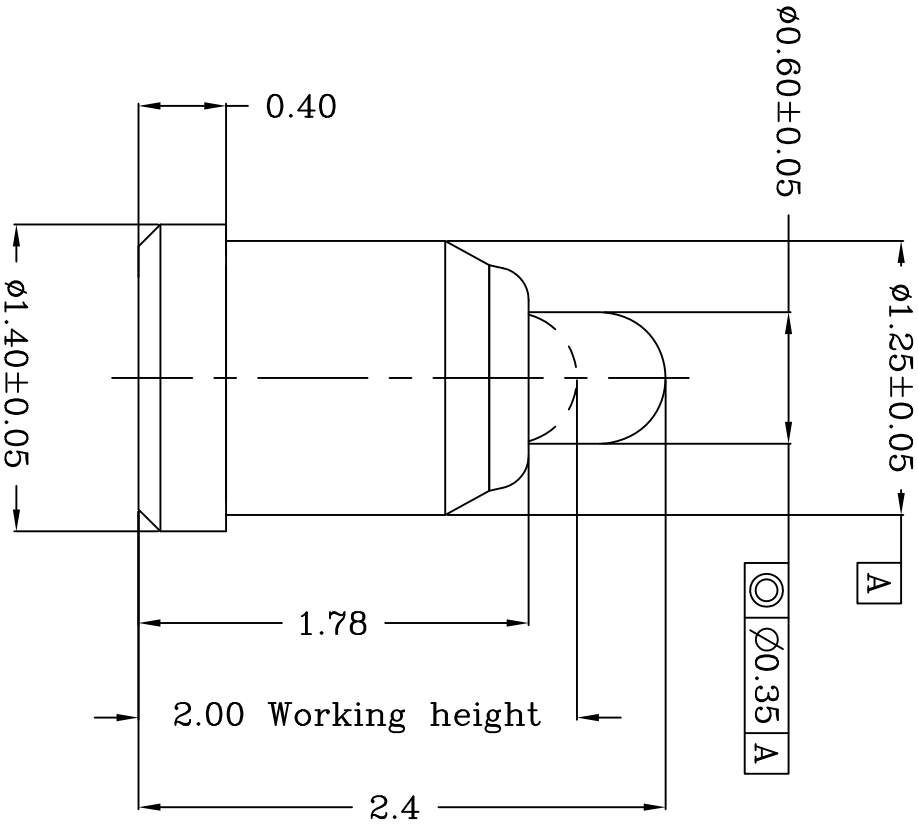

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				

Table 1 Mechanical performance		
working height	2.0mm	60±20gf <3.1>
Durability	10000cycle	

- Not
- 1 Dempnsons shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <3.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 50mOhm Max
 - Current rating: 1.0A
 - 4 Reverse complaint.

TOP LINK

Top-Link Electronics Ltd.		Type	Customer drawing		Unit	mm		Weight			
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin		APVD:						
0.0 = ±0.15		CHK:			REL:						
0.00 = ±0.10											
0.000 = ±0.005											
Angle: ±1°											
SURF. TEXTURE:											
REMOVE BURRS.											
BREAK SHARP EDGES											
R0.05 MAX. DO NOT SCALE PRINT.											
Name		POGO PIN		PG-1.4-0.4-1.25-1.78-2.40							
Scale		1:1		Size		A4		DWG No.		C-101633	
Rev.		NEW		Revision record.		Date.		2011/05/23			

101633-1
PART NUMBER

Top-Link Electronics Ltd.

DIST

4

3

2

1