



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.





DWG NO.
C-100172

LDC
DIST
-

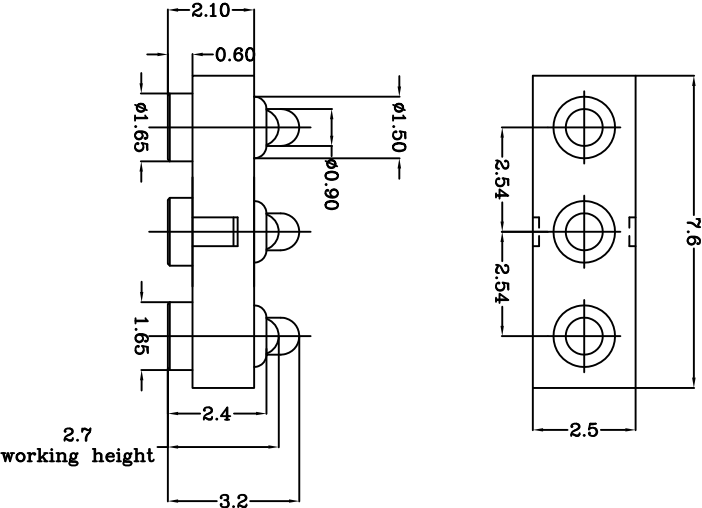

Notes:
1 Material, Housing: PA 4.6 (30% Glass Filled)
Contact: Brass
2 Mechanical demands:
Plating Plunger: 0.4um Au over 1.25um Ni
Plating Body: 0.1um Au over 1.25um Ni

TOP-LINK

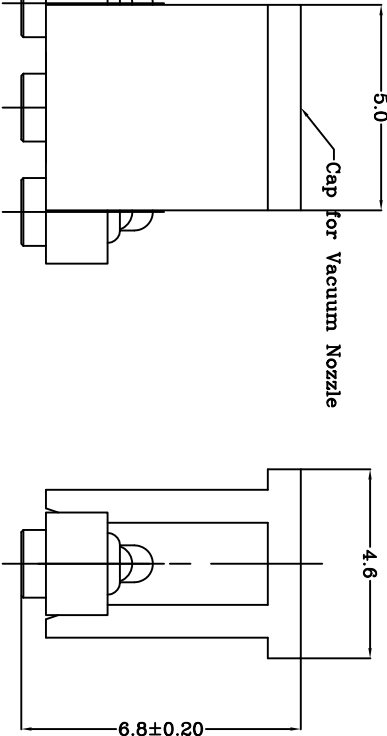

Recommended Solder Paste thickness is 0.10 mm

Recommended PCB Layout

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				RECOMMENDED PCB LAYOUT			
0	= ±	0.0	= ±0.15	MATL	1	HT TR	FIN
0.00	= ±	0.10	= ±0.10	DWN	APVD	Lansing	Top-Link
0.000	= ±	0.000	= ±	CHK	REL	Electronics	Electronics Ltd.
ANGLE: ±1°				NAME	BATTERY	POGO CONNECTOR 3 POSITIONS	
SURF TEXTURE: 32/				SCALE	1:1	A4	DWG
REMOVE BURRS, BREAK				SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT				NO.	C-100172		

USED ON

-