

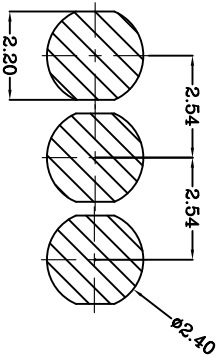
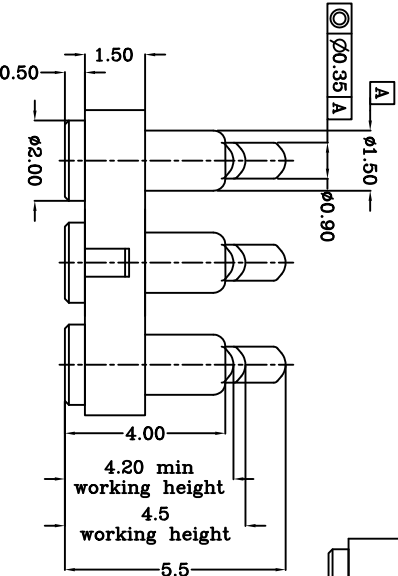
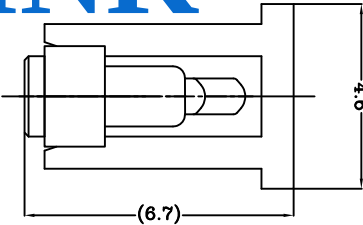


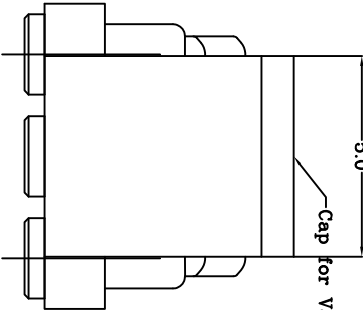

proposal

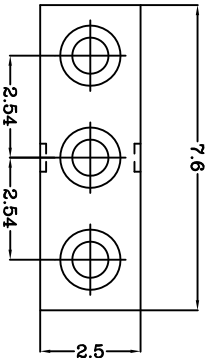

TOP-LINK

Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Max.working height	4.50mm	125±30gf <2.1>
Durability	10000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHERWISE SPECIFIED		DWN: Gui zhiguo	APVD:	<u>Top-Link Electronics</u> Top-Link Electronics Ltd.
0.0 = ±0.15		CHK:	REL:	
0.00 = ±0.10				
0.000 = ±0.005				
Angle: ±1°				
SURF. TEXTURE: REMOVE BURRS.				
BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.				
Name Pogo pin connector				
Scale 1:1	Size A4	DWG No. C-100176	Page 1/1	Rev. 1

DIST

Rev.	Revision record.	Date.
1	NEW	2014/03/14
3	Revision record.	