
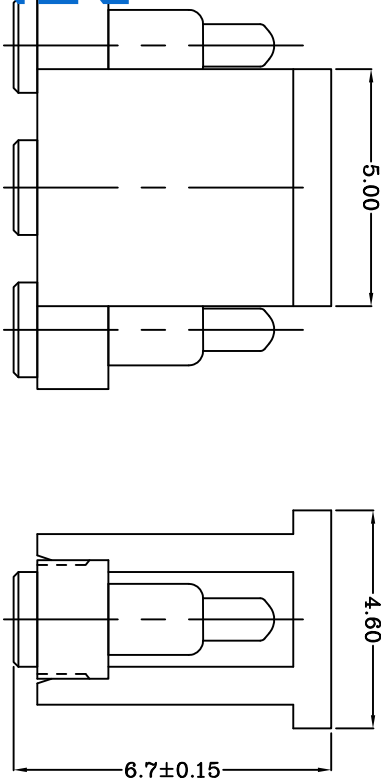
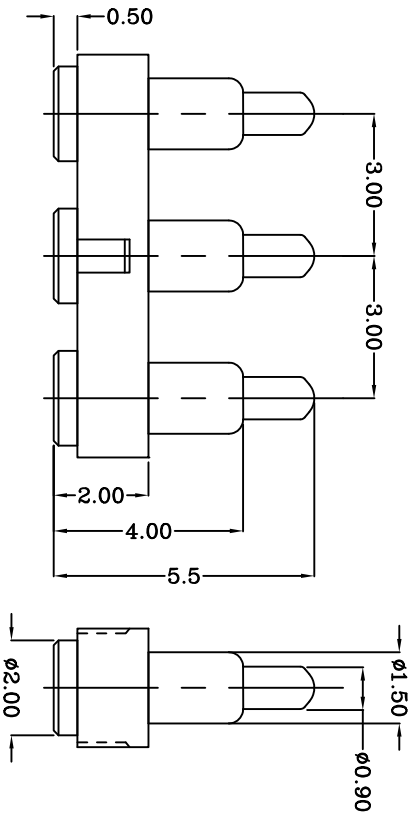




TOP-LINK

Notes:

1 Material, Housing: PA 4.6 (30% Glass Filled)

Color Black.

Contact: Brass

2 Mechanical demands:


1)Plating Plunger: 0.4um Au over 1.4um Ni
2)Plating Body: 0.1um Au over 1.4um Ni.

3 Mechanic:

1)Force: 30±15gf per pin at 1.0mm stroke
2)Total stroke : 1.40mm
3)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.
2)Voltage rating: 36V DC Max
3)Current rating: 2.0A

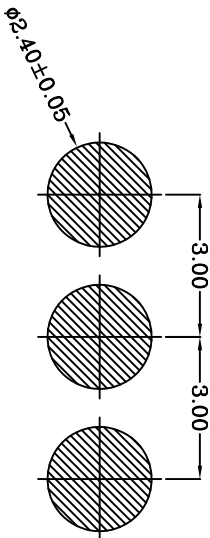

Recommended PCB Layout

LDC	-
DIST	-

Renovate		2010/06/27
NEW		2010/06/13
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.10		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
CHK		REL	
NAME	PGGD 3P PGC-1.5-5.5-R-3P-3.0PH		
SCALE	1:1	A4	DWG NO.
			C-100601
			SHEET 1 OF 1
			REV 2

100601-3
PART NUMBER

Top-Link
Electronics L.td.