
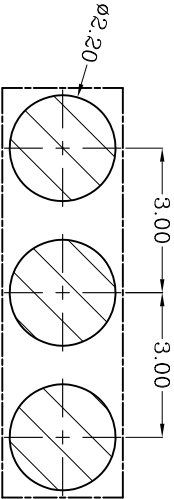


DWN No.:
C-110530

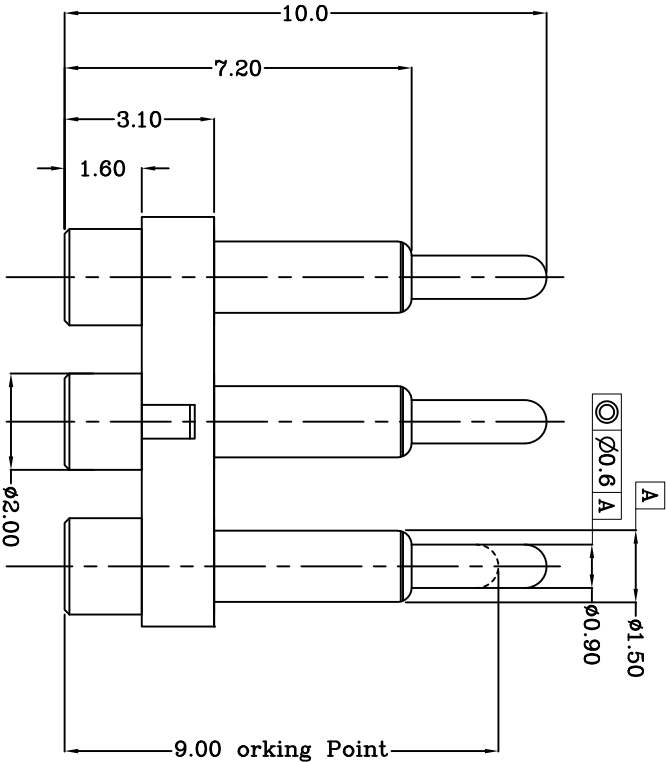

TOP-LINK

Item	Part name	Q'ty/Ea	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Max. working height	9.0mm	100±25gf <2.1>
Durability	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 Packaging specification conforms to EIA 481
 - 5 RoHS compliant.
- | |
|--------|
| 100530 |
|--------|

100530-3
PART NUMBER

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHERWISE SPECIFIED		DWN:	APVD:	 Top-Link Electronics		
0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± —		Qin Zuozhong	REL:			
Angle: #1 SURF. TEXTURE: REMOVE BURRS BREAK SHARP EDGES R0.5 MAX.DO NOT SCALE PRINT.		Name		Pogo pin connector		
Scale	1:1	Size	A4	DWG No.	C-110530	Page 1/1
				Rev.	1	

4

3

2

1

1