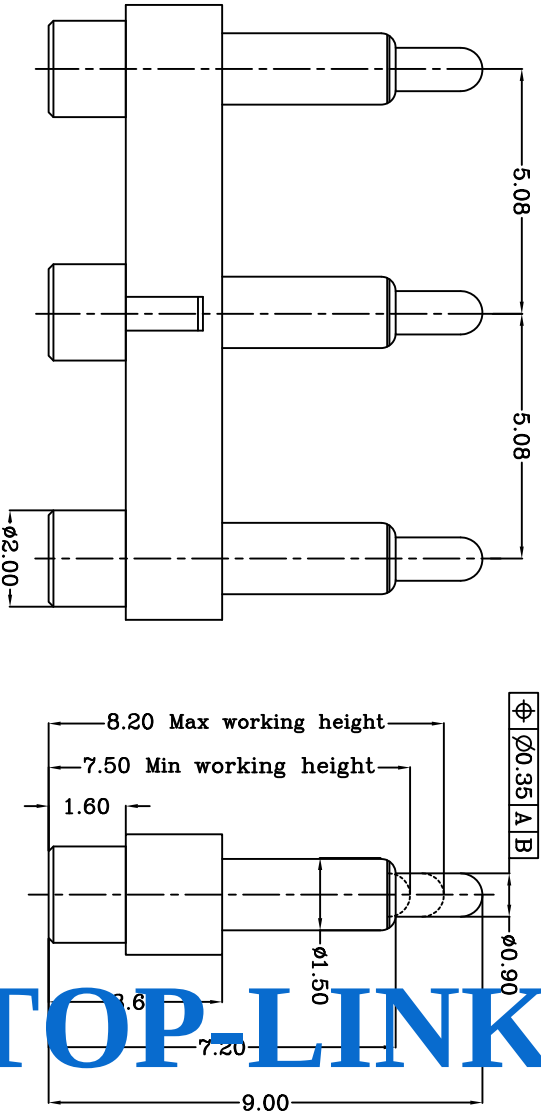
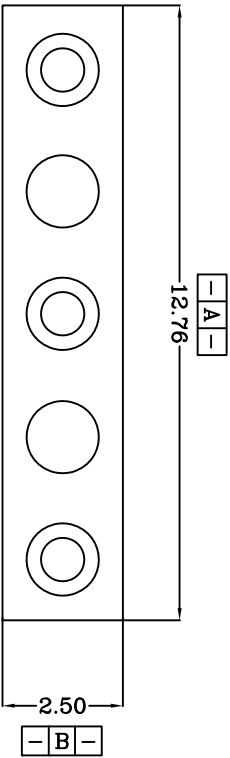


TOP-LINK

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp,Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp,Plastic UL94 V-0 Color Black	_____

Table 1 Mechanical performance		
Max.working height	8.20mm	gf <2.1>
Min.working height	7.50mm	gf
Durabiility	10000cycle	

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning:Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 Packaging Spec.Conformance to EIA 481
 - 5 RoHS compliant.

DIST

Rev.	NEW	2011/07/14
Revision record.		Date.

Top-Link Electronics Ltd. TOLERANCES UNLESS OTHER SPECIFIED									
0.0		= ± 0.15		DWN:		APVD:		Top-Link Electronics Top-Link Electronics Ltd.	
0.00		= ± 0.10		CHK:		REL:			
0.000		= ±							
Angle: ±1°									
SURF. TEXTURE:									
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.									
Name				Customer drawing					
Scale		Size		DWG No.		Page		Rev.	
1:1		A4		C-110713		1/1		1	
2				1					

110713-3	PART NUMBER
----------	-------------