


Recommended PCB Layout

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic U194 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

Table 1 Mechanical performance

Table 1 Mechanical performance		
Max. working height	6.70mm	40±15gf <2.1>
Min. working height	5.90mm	80±25gf
Durability	10000cycle	

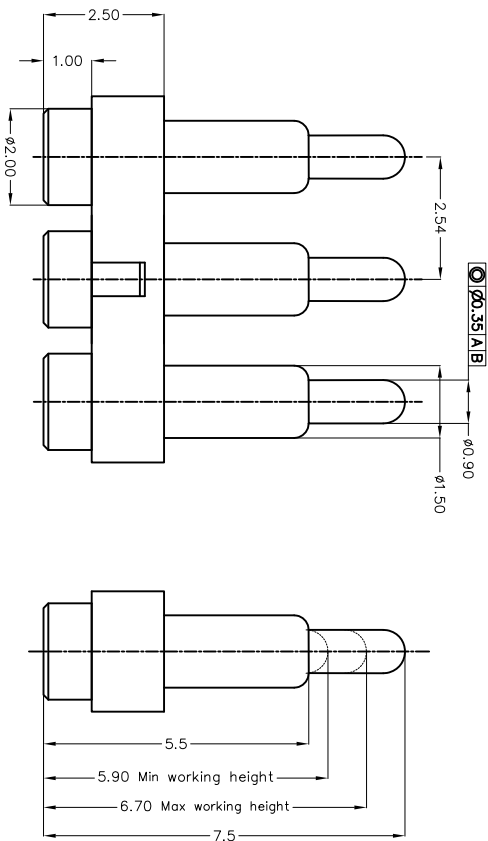

Notes:

Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<u>2.1> The force is the average of forces obtained when plunger

goes downwards and upwards.

<?>Warning: Working height are not permitted to be less

man Min working height.

3 Electrical performance

Resistance: 100mOhm Max.Current rating: 0.5A

5 RoHS compliant.

TOP-LINK

110734-3
PART NUMBER

Top-link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	APVD:	Top-link Electronics Electronics Ltd.		
0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ±	Qin Zuozhong	REL:			
Angle: #1 SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.	Name	Customer drawing			
	Scale	Size	DWG No.	Page	Rev.
	1:1	A4	C-110734	1/1	1
	2			1	