



DWG NO.
C-200014

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

POINT OF MEASUREMENT
PICK&PLACE AREA

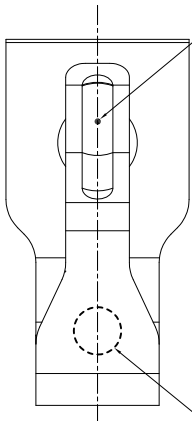

NOTES:

1. MATERIAL:
COPPER ALLOY, THICKNESS=0.15.
2. PLATING:
1.25um(50u"2)Min Ni UNDER PLATING,
0.025um(1u"2)Min Au PLATING OVER ALL.

3. SPECIFICATION:

3.1 ELECTRICAL CHARACTERISTICS:

CURRENT RATING : 1.0A,
VOLTAGE RATING : 50 VAC/DC,
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:




CONTACT NORMAL FORCE: 50gf min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:

4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW 'RoHS'

拓普联科

TOP-LINK

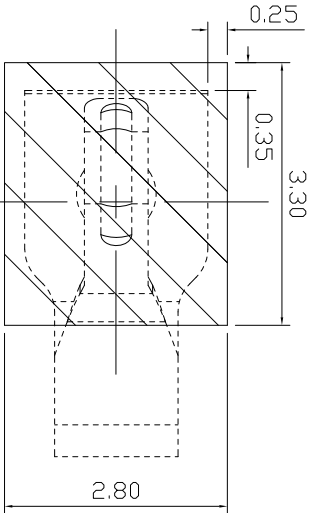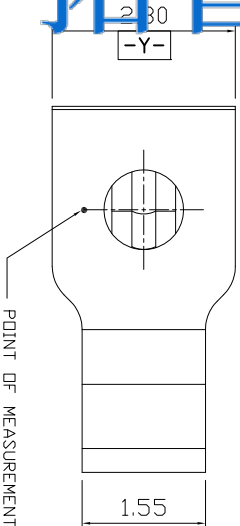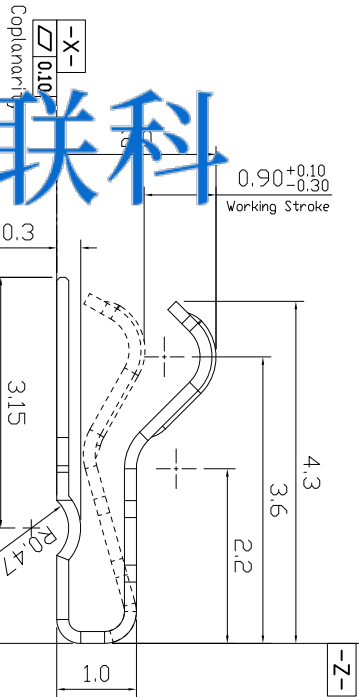

PAD OF PCB.

A1	Update		2015/11/06
----	--------	--	------------

A	NEW		
---	-----	--	--

LTR	REVISION RECORD	APVD	DATE
-----	-----------------	------	------

200014-1	2	CARRIER TAPE	P=8mm	WHITE=12mm,Q/Y/REEL=3000 Pcs
1	2.0H 2.3W ANTENNA CLIPS	1Pcs	NOTES 1,2	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10

ANGLE: = ±3°
0 = ±1.5°

REMOVE BURRS, BREAK
SHARP EDGES R0.10 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
------	-------	-----

DVN	APVD	REL	Top-Link Electronics L.td.
CHK	Kent		

NAME	SCALE	DWG NO.	SHEET	REV
CUSTOMER DRAWING FOR 2. 0H, 2. 3W, ANTENNA CLIPS	1:1	A4	1 OF 1	A1

USED ON

-