

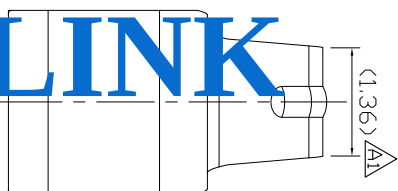


USED ON

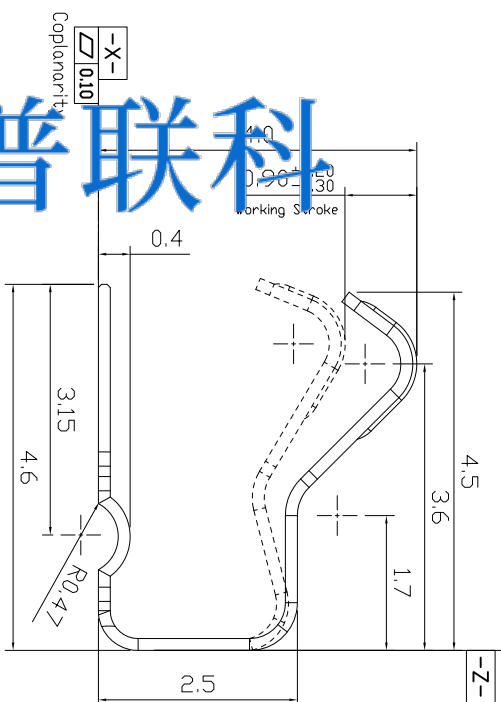

NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS=0.15.
2. PLATING: 1.25um<50u*/min N UNDER PLATING.
0.025um(1u*/min Au PLATING OVER ALL.

3. SPECIFICATION:

CURRENT RATING : 1.0A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX

3.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE: 50gf min PER PIN AT

DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE

WITHOUT DEGRADING

3.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C


4. TAPE & REEL PACKAGING PER EIA481 STANDARD

5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009


6. HARMFUL MATERIAL CONTROL FOLLOW "ROHS"

拓普联科

TOP-LINK

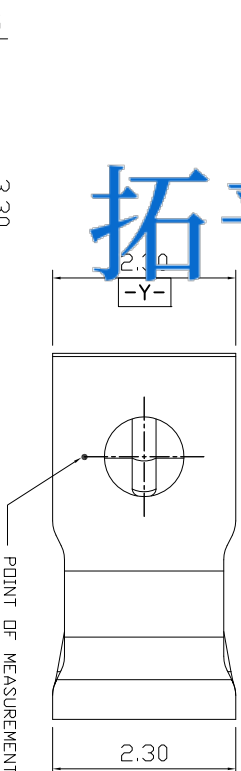

PAD OF PCB

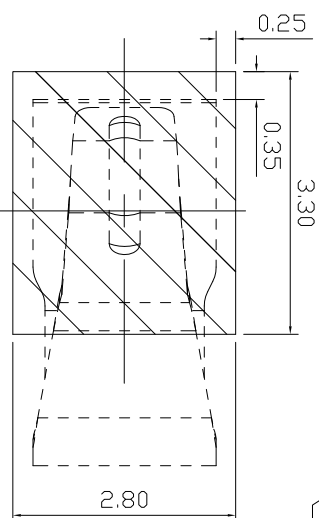

AI	Update	2015/11/06
A	NEW	
LTR	REVISION RECORD	APVD DATE

200018-1		2	CARRIER TAPE	P=8mm	WHITE:M=12mm,D/Y/RED=L=1800 Pcs
		1	4.0H 2.3W ANTENNA CLIPS	1Pcs	NOTES 1,2
ASSEMBLY NUMBER	ITEM	PART NAME		QTY	DESCRIPTION
DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED					
0	= ±-	MATL		HT	TR
0.0	= ±0.15	DWN		FIN	
0.00	= ±0.10	CHK	Caution	APVD	Lonsing
ANGLE: 0			Kent	REL	Top-Link Electronics
0.0	= ±1.5°	NAME		Top-Link Electronics Ltd.	
REMOVE BURRS, BREAK SHARP EDGES R0.10 MAX					
DO NOT SCALE PRINT		SCALE	1:1	A4	DWG NO.
		C-200018		SHEET 1 OF 1	REV A1