

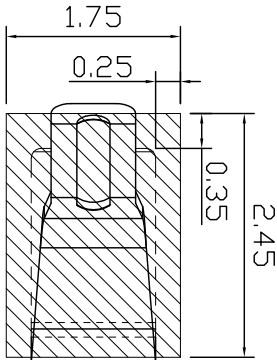
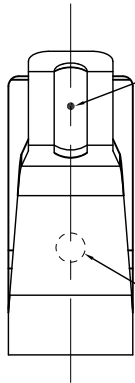


POINT OF MEASUREMENT

PICK&PLACE AREA

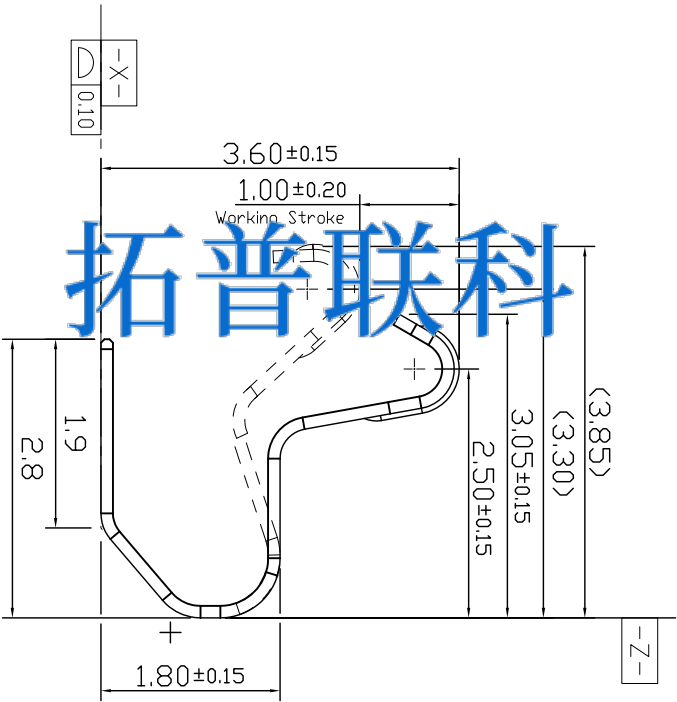


PAD OF PCB.



TOP-LINK

- NOTES:
1. MATERIAL: COPPER ALLOY, THICKNESS=0.12.
 2. PLATING: 1.25um(50u"Min Ni UNDER PLATING, 0.025um(1u"Min Au PLATING OVER ALL.

3. SPECIFICATION:
 - 3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 10A.
VOLTAGE RATING : 50 VAC/DC
LOW LEVEL CONTACT RESISTANCE:50mΩ MAX
 - 3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf Min PER PIN AT WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING
 - 3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

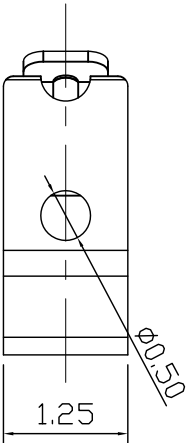

LDC

DIST

-

NEW			
REVISION	APVD	DATE	
RECORD			
LTR			

200055-1	2	CARRIER TAPE	P=8mm	WHITE.W=16mm.QTY/REEL=2000 Pcs
1	3.6H 1.25W ANTENNA CLIPS	IPcs	NOTES 1,2	
ASSEMBLY NUMBER	ITEM	PART NAME	QTY	DESCRIPTION
DIMENSIONS IN MM		MATL		
TOLERANCES UNLESS		DWN		
OTHER SPECIFIED		Kent	APVD	
0 = ±		CHK	REL	
0.0 = ±0.15				
0.00 = ±0.10				
ANGLE: = ±3°				
0 = ±1.5°				
0.0 = ±1.5°				
REMOVE BURRS, BREAK				
SHARP EDGES R0.10 MAX				
DO NOT SCALE PRINT				

SCALE	A4	DWG	C-200055	SHEET	REV
1:1		NO.		1 OF 1	A
CUSTOMER DRAWING FOR 3.6H, 1.25W, ANTENNA CLIPS					

Top-Link
Electronics Ltd.