




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.





C-200057

POINT OF MEASUREMENT PICK&PLACE AREA

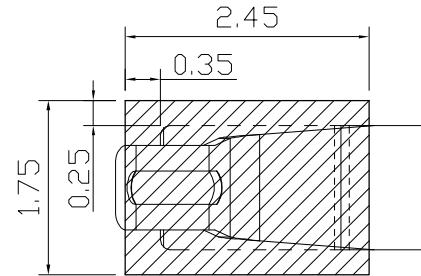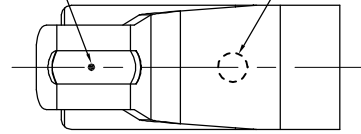

PAD OF PCB.

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05

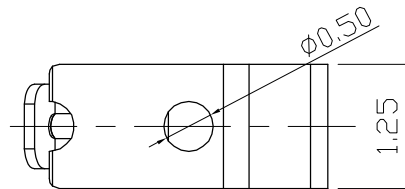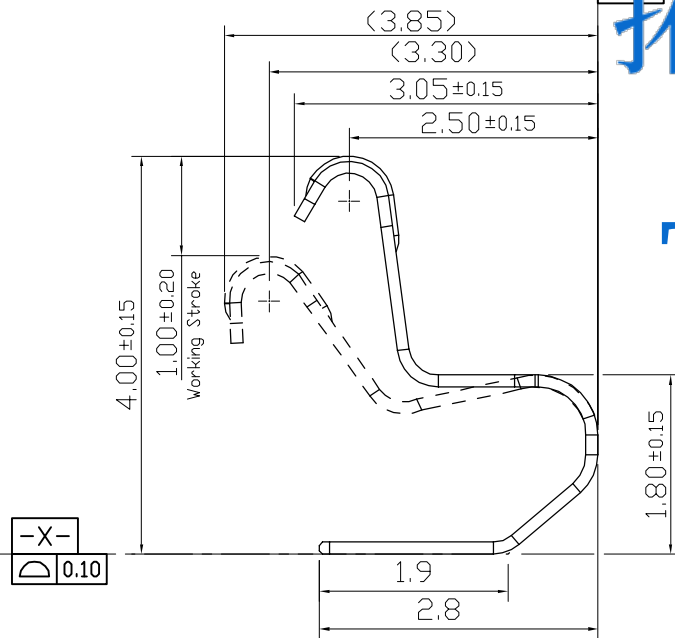

拓普联科

TOP-LINK

- NOTES:
1. MATERIAL:
COPPER ALLOY, THICKNESS=0.12.
 2. PLATING:
1.25um(50u")Min Ni UNDER PLATING.
0.25um(1u")Min Au PLATING OVER ALL.
 3. SPECIFICATION:
3.1 ELECTRICAL CHARACTERISTICS:
CURRENT RATING : 1.0A.
VOLTAGE RATING : 50 VAC/DC.
LOW LEVEL CONTACT RESISTANCE: 50mΩ MAX
3.2 MECHANICAL CHARACTERISTICS:
CONTACT NORMAL FORCE: 30gf Min PER PIN AT
WORKING STROKE
DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE
WITHOUT DEGRADING
3.3 ENVIRONMENTAL CHARACTERISTICS:
OPERATING TEMPERATURE RANGE : -20°C TO +70°C.
 4. TAPE & REEL PACKAGING PER EIA481 STANDARD.
 5. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
 6. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

200057-1	2	CARRIER TAPE	P=8mm	WHITE, W=**mm, Q'ty/REEL=**** Pcs
	1	3.6H 1.25W ANTENNA CLIPS	1Pcs	NOTES 1,2
ASSEMBLY NUMBER	ITEM	PART NAME	Q'TY	DESCRIPTION

DIMENSIONS IN MM TOLERANCES UNLESS OTHERS SPECIFIED 0 = ± 0.0 = ±0.20 0.00 = ±0.15 ANGLE: 0 = ±3° 0.0 = ±1.5° REMOVE BURRS. BREAK SHARP EDGES R0.10 MAX DO NOT SCALE PRINT	MATL		HT TR		FIN	
	1		—		— ✓	
	DWN		APVD		Top-Link Electronics Top-Link Electronics Ltd.	
	CHK		REL			
NAME						
CUSTOMER DRAWING FOR 4. 0H, 1. 25W, ANTENNA CLIPS						
SCALE		A4	DWG NO.		SHEET	REV
1:1			C-200057		1 OF 1	1

LDC
-
DIST
-

4

3

2

1

A