
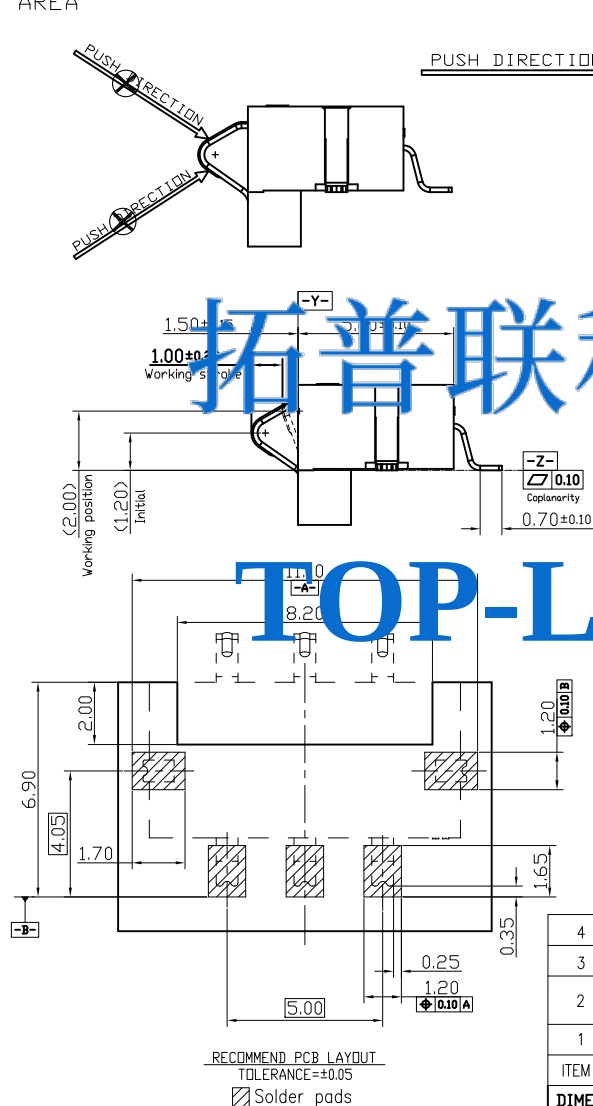
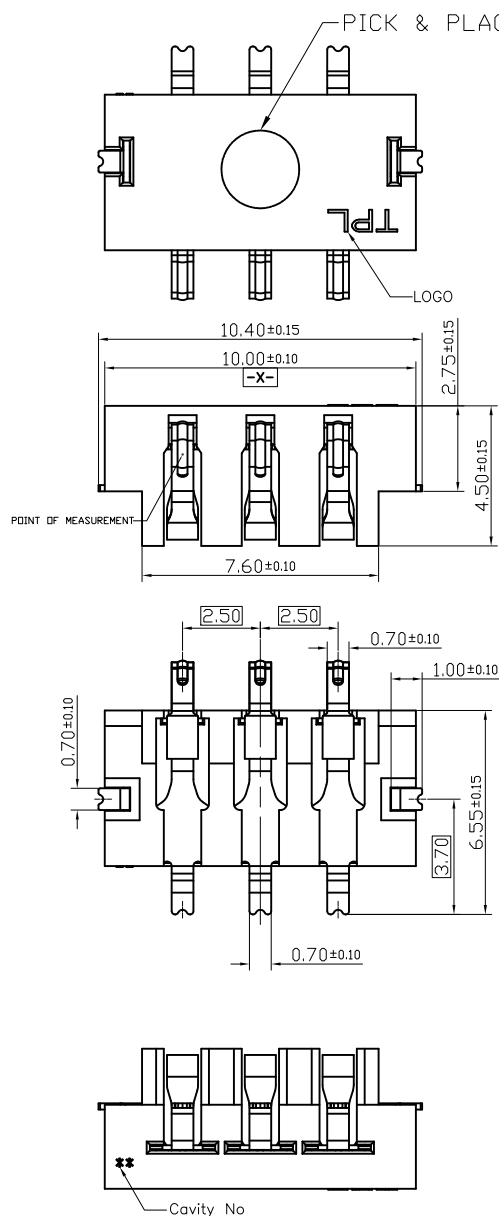


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.


DWG NO.

C-200037



拓普联科
TOP-LINK

USED ON



NOTES:

1. SPECIFICATION:

1.1 ELECTRICAL CHARACTERISTICS:

VOLTAGE RATING : 200V AC/DC

CURRENT RATING:1.0A

LOW LEVEL CONTACT RESISTANCE:50mΩ Max.

1.2 MECHANICAL CHARACTERISTICS:

CONTACT NORMAL FORCE:80gf Min PER PIN AT WORKING STROKE

DURABILITY : MATED 10,000 CYCLES AT WORKING STROKE WITHOUT DEGRADING

1.3 ENVIRONMENTAL CHARACTERISTICS:

OPERATING TEMPERATURE RANGE : -20°C TO +70°C.

2. TAPE & REEL PACKAGING PER EIA481 STANDARD.

3. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.

4. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

			PART NUMBER	200037-3
4	CARRIER TAPE	12mm	TRANSPARENCY,W=16mm,Q'ty/REEL=1000Pcs.	
3	PAD	2	SUS,Ni:20u"(0.5um)Min OVER ALL,Sn:50u"(1.25um)Min OVER ALL.	
2	CONTACT	3	COPPER ALLOY,Au:1u"(0.025um) Min OVER ALL. Au:10u"(0.25um)Min ON CONTACT AREA.	
1	HOUSING	1	HIGH TEMPERATURE THERMAL PLASTIC	
ITEM	PART NAME	QTY	DESCRIPTION	

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.20
0.00 = ±0.15

ANGLE:
0 = ±3°
0.0 = ±2°

REMOVE BURRS. BREAK
SHARP EDGES R0.10 MAX
DO NOT SCALE PRINT

MATL		HT TR		FIN	
DWN	Kent	APVD	Lansing	 Top-Link Electronics Ltd.	
CHK	Harvey	REL			
NAME					
CUSTOMER DRAWING FOR 3PIN 2.5PITCH 4.5H SINK BATTERY CONNECTOR (ON BOARD 2.75H)					
SCALE	A4	DWG NO.	C-200037	SHEET	REV
1:1				1 OF 1	A

LDC
-
DIST
-

4

3

2

1