

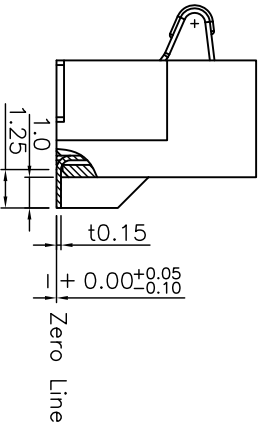
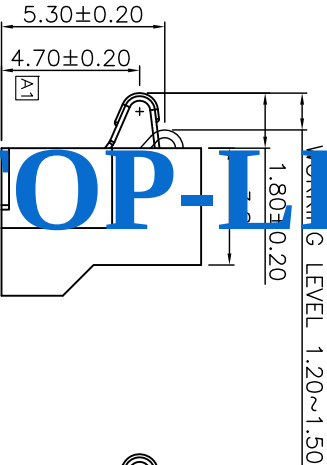

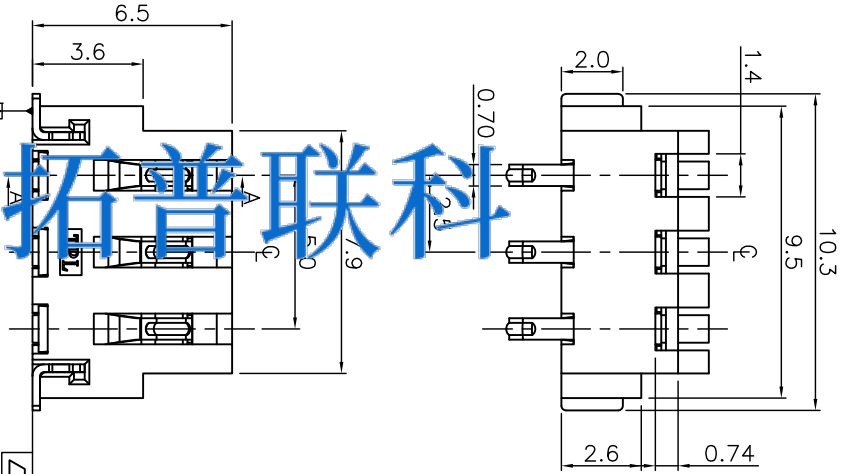




RECOMMENDED P.C.B LAYOUT (Component Side)

USED ON

Notes
1.material:
plastic: LCP (UL94V-0), color black
terminal: beryllium copper (C1720 HM)
2.electrical specifications:
voltage rating:12v DC min
current rating:2.0A min
dielectric strength: 500V AC for 1 minute 1 mA
insulation resistance:1000 meg ohm min
contact resistance:30 mill. ohm max
operation temperature: -40°to +105°
product withstanding reflow soldering 260°for 10s
3.mechanical specifications:
durability :5000cycles
normal force at mated position:50g min

TOP-LINK

SECTION A-A

200001-3

PART NUMBER

MATL	HT	TR	FIN
Qin	APVD	REL	Top-Link Electronics Ltd.

NAME	SCALE	DWG	NO.	SHEET	REV
2.50 Pitch Spring Battery Connector	4:1	A4	C-200001	1 OF 1	A1

REVISION	APVD	DATE	RECORD
NEW		2007/08/16	
Update		2013/06/04	

LDC	-
DIST	-

4

3

2

1