


DWG NO. C-101170

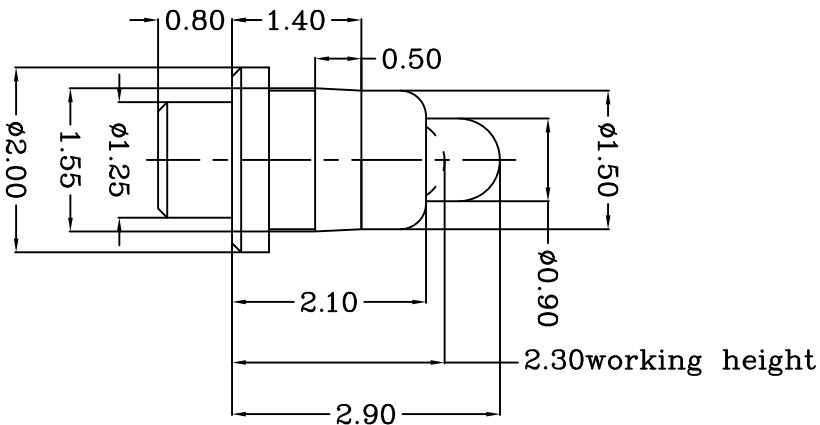

Notes
Materials

Materials:

1) **Header** & **Body** : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring: Stainless steel wire

2 Plating

1) Bump Min 0.1um Gold plating over min. 1.4um Nickel plating

2) **Plunger:** Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1) Total stroke : 0.7mm

2) **durability:** 10,000 cycle min.

3

Electrical

1) Contact resistance: 30mΩ

2) Operating voltage: 36VDC

TOP LINK

LDC	-
DIST	-

	土壤彈簧及彈力規格	2008/07/29
	NEW	2008/03/19
LTR	REVISION RECORD	APVD DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATERIAL		HT TR		FIN	
0 = ±-		DWN		1		— ✓	
0.0 = ±0.15		QIR		APVD		Top-Link	
0.00 = ±0.10		CHK		REL		Electronics	
0.000 = ±-						Electronics Ltd.	
ANGLE: ±1°							
SURF TEXTURE: 32/		NAME		PGGD PIN			
REMOVE BURRS, BREAK				PG-1.0-0.8-1.5-2.1-2.9			
SHARP EDGES R0.05 MAX		SCALE		DWG		SHEET	
DO NOT SCALE PRINT		1:1		C-101170		1 OF 1	
		A4		REV		B	

101170-1	PART NUMBER
----------	-------------

USED ON