



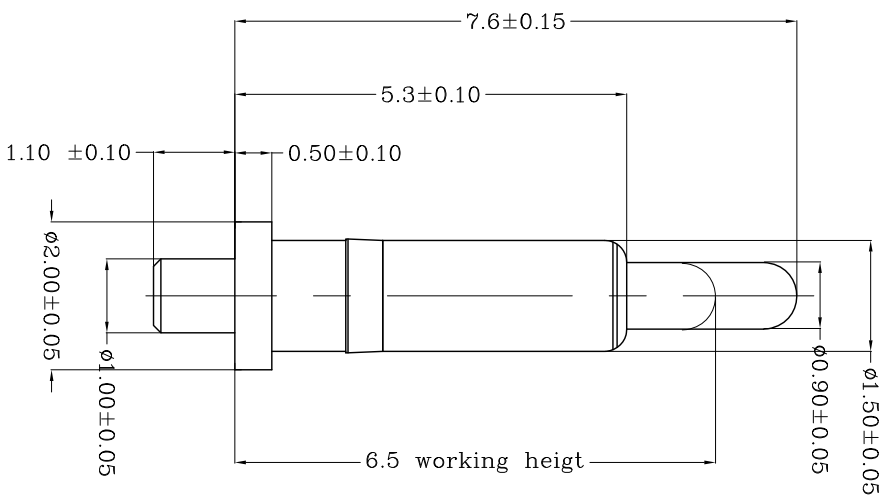

TOP-LINK

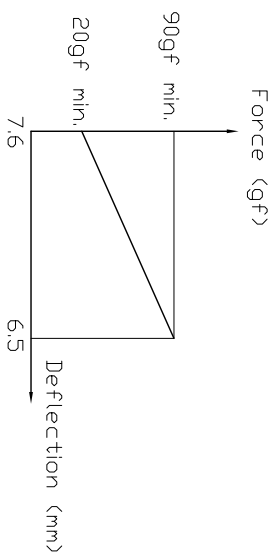

Notes: Material:

Material: $\triangle 1$

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

1) Total stroke : 1.4mm

2)Durability: 10,000 cycle min.

4 Electrical

1) Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

LDC				ANGLE: 11		NAME			
-		NEW		SURF TEXTURE: 32/ V	POGD PIN				
DIST				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	PG-1.0-1.1-2.0-0.5-1.5-5.3-7.6				
-	LTR	REVISION RECORD	APVD	DATE	SCALE 1:1	A4	DWG NO. C-101220	SHEET 1 OF 1	REV A

USED ON