

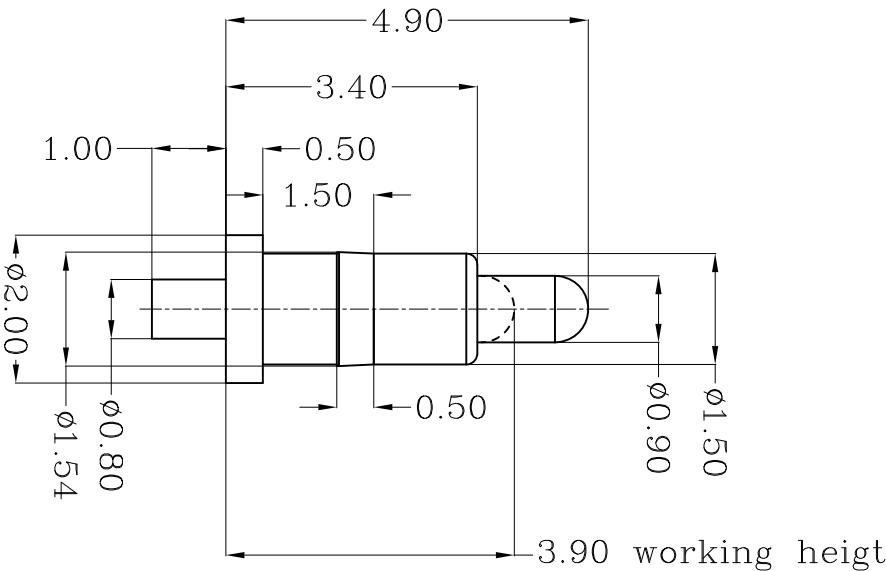




TOP-LINK

Notes:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
3 Mechanical
1)Total stroke : 1.4mm
2)Durability: 10,000 cycle min.
Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

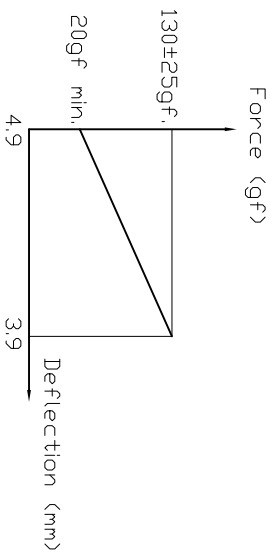

USED ON

101256-1
PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°

SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL HT TR — FIN —

DWN APVD LANSING Top-Link Electronics Ltd.

CHK REL

NAME PG0D PIN PG-0.8-1.0-2.0-0.5-1.5-3.4-4.9

SCALE 1:1 A4 DWG NO. C-101256 SHEET 1 OF 1 REV A

LTR REVISION RECORD APVD DATE 080813

4

3

2

1