


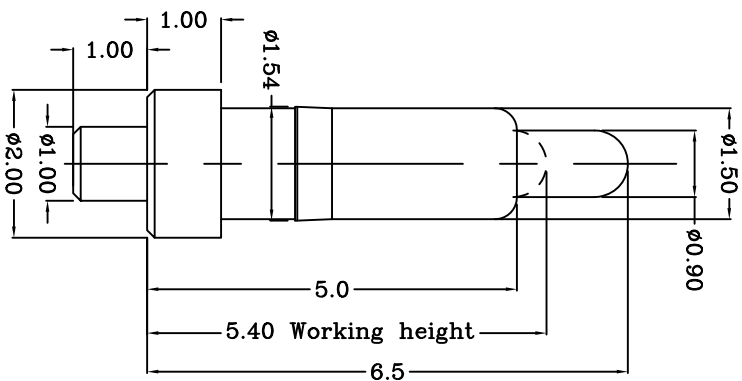

Notes:

① Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

②: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical (机械性能):

1) Force: $130 \pm 30 \text{ gf}$ per pin at 1.1mm stroke

下压1.1mm的力:130±30gf)

2) Total stroke (总行程) : 1.5mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical (电性能)

1) Contact resistance (接触抵抗): 30mOhm Max.

Voltage rating(额定电压): 36V DC Max

Current rating (额定电流): 2.0A

101345-1	PART NUMBER
----------	-------------

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= ±—	DWN		APVD		Top-Link Electronics Top-Link Electronics Ltd.	
0.0	= ±0.15	Qln					
0.00	= ±0.10	CHK		REL			
0.000	= ±						
ANGLE: ±1°							
SURF TEXTURE: 32/ 		NAME POGO PIN PG-10-1.0-2.0-1.0-1.5-6.5					
REMOVE BURRS, BREAK SHARP EDGES, ROUNDS MAX DO NOT SCALE PRINT	SCALE	A4	DWG NO.	C-101345	SHEET 1 OF 1	REV	A1

LDC	-
DIST	-

	NEW	2007/05/06
LTR	REVISION RECORD	APVD DATE