




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO. C-101353

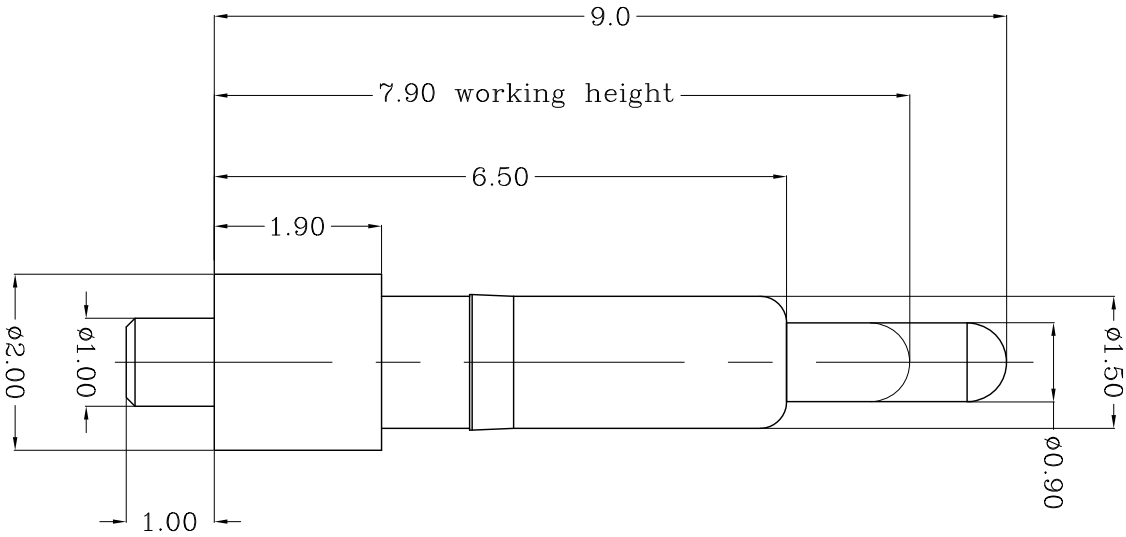

Recommended Solder paste thickness is 0.10 mm
Recommended PCB Layout

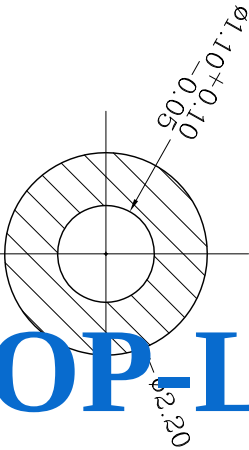

TOP-LINK

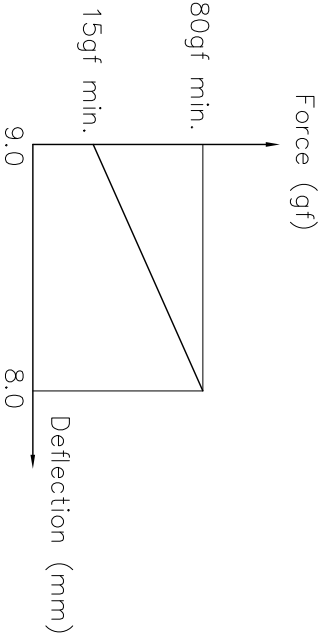

- Notes:
- △ Material:
- 1)Plunger & Body : Brass
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.8mm

USED ON —

LOC
-
DIST
-

L TR	NEW		09/04/21
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	Qin	APVD
CHK	Andy	REL
NAME	PGO GO PIN	Top-Link Electronics Ltd.
SCALE	PG-1.0-1.0-2.0-1.9-1.5-6.5-9.0	
1:1	A4	DWG NO. C-101353
SHEET	1 OF 1	REV A

101353-1
PART NUMBER