

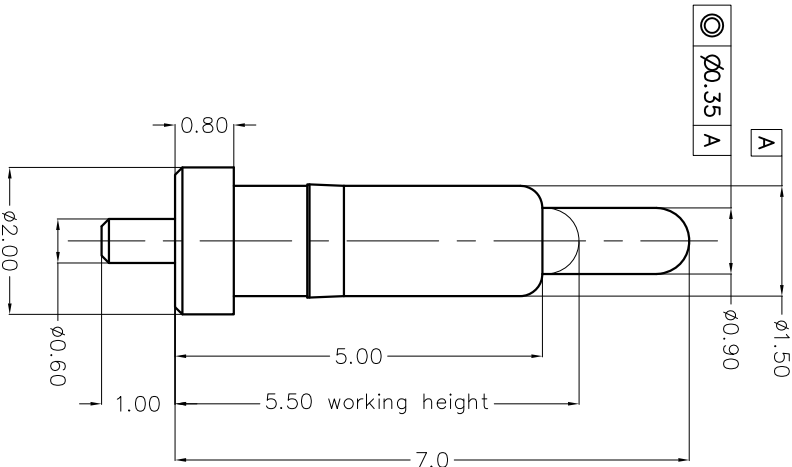



Table 1 Mechanical performance		
working height	5.50mm	80±35gf <2.1>
Durability	10000cycle	

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> Stroke force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Total stroke : 1.9mm.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leoded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101379-1	
0.0	±0.15	DWN: Qin zuozhong	APVD:		 Top-Link Electronics Ltd.	
0.00	±0.10	CHK:	REL:			
0.000	±0.01	Angle: ±1°				
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.		Name	POGO PIN			
Scale	Size	DWG No.		Page	Rev.	
1:1	A4	C-101379		1/1	C	