


DWG NO. C-101381

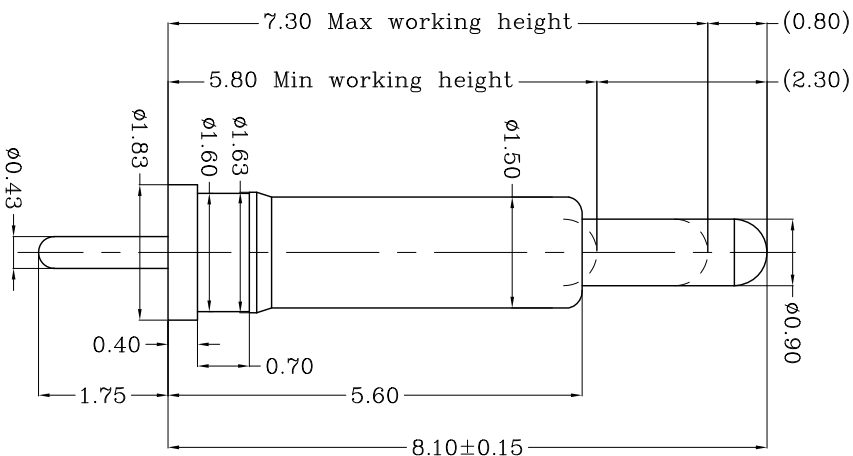

TOP-LINK

- 1) Body : C36000
- 2) Plunger: C36000 or C27000
- 3) Spring : Stainless steel wire

- 2 Plating
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
 - 1) Total stroke : 2.4mm
 - 2) Durability: 10,000 cycle min.
- 4 Electrical
 - 1) Contact resistance: 30mOhm Max.
 - 2) Operating voltage: 36VDC MAX.

LDC				2009/09/02
-				
DIST				2009/09/01
-				

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= ±	DWN	APVD	<i>Top-Link</i>		Top-Link	
0.0	= ±0.15	qin		<i>Electronics</i>		Electronics L td.	
0.00	= ±0.10	CHK	REL				
0.000	= ±						
ANGLE: ±1°							
SURF TEXTURE: 		NAME					
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		SCALE	A4	DWG NO.	C-101381	SHEET 1 OF 1	REV B

101381-1
PART NUMBER

USED ON