


LDC	-
DIST	-

Notes:
△Material(材质):

- 1)Body : C36000
 - 2)Plunge : C36000
 - 3)Spring : Stainless steel wire
- 2 Plating(电镀):
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.25um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.25um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
- 1)Force: 90±20gf per pin at 2.5mm(力:2.5mm的力:90±20gf)
 - 2)Total stroke(总行程) : 3.40mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
- 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 3.0A

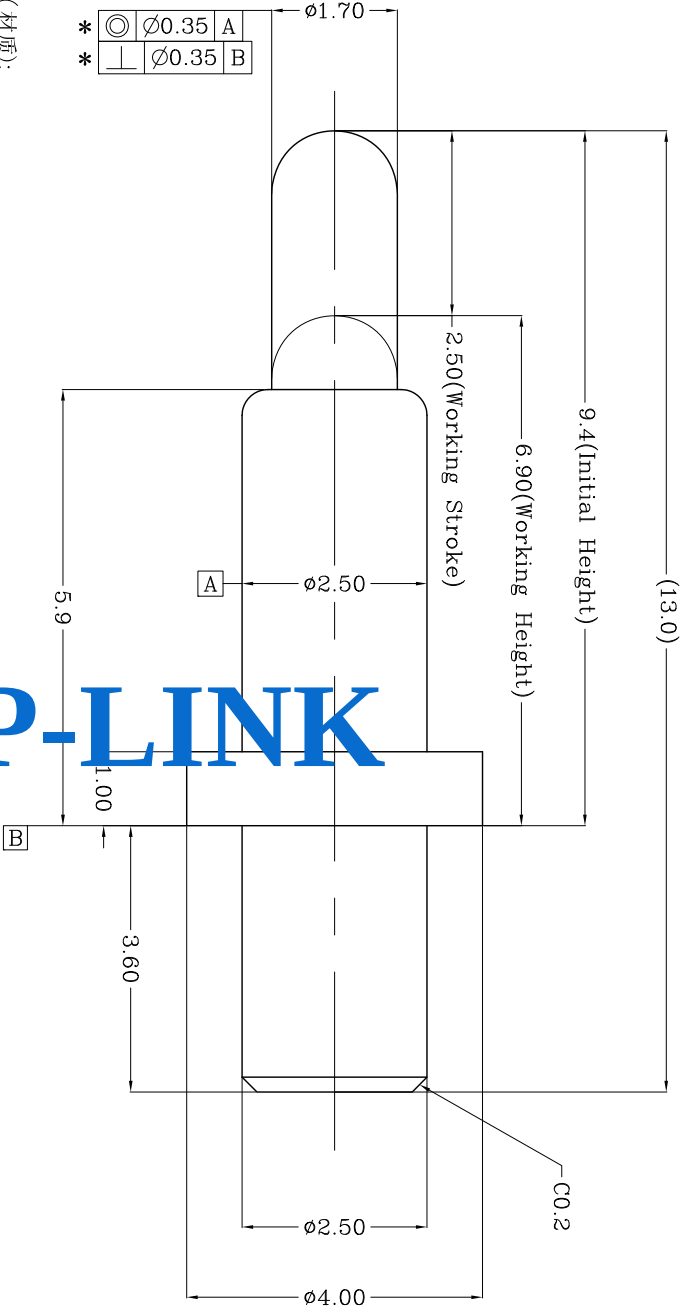

TOP-LINK

USED ON
-

101416-1

PART NUMBER

A

B

C

D

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATERIAL		HT TR		FIN	
0 = ±				DWN		APVD		Top-Link Electronics	
0.0 = ±0.15				QIN				Top-Link Electronics Ltd	
0.00 = ±0.10				CHK		REL			
0.000 = ±									
ANGLE: ±1°									
SURF TEXTURE: 3.2/ V				NAME		PGGD PIN			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT				SCALE		PG-2.5-3.6-4.0-1.0-2.5-5.9-13.0			
1:1		A4		DWG NO.		C-101416		SHEET 1 OF 1	
								REV A1	