
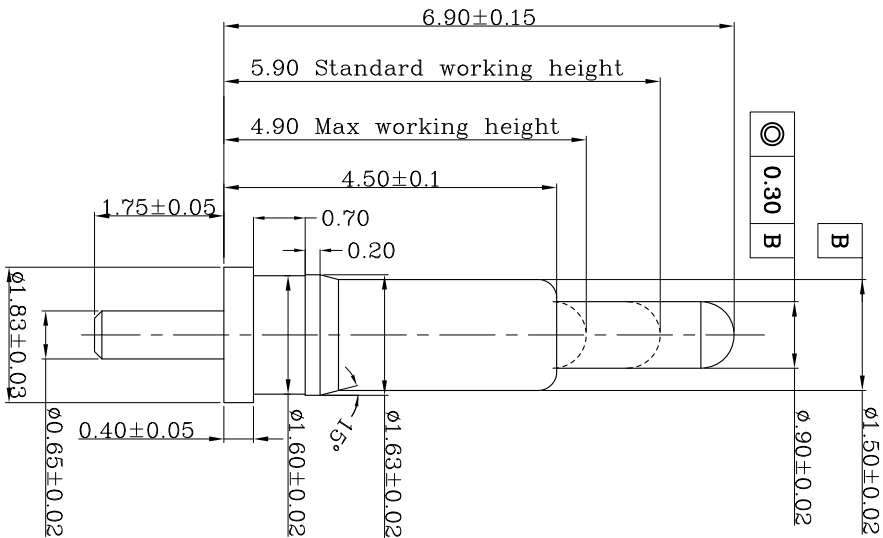




Notes:

- 1) Material(材质):
1) Body : Brass C3604
2) Plunge : Brass C3604&C27000
3) Spring : Stainless steel wire
2 Plating(电镀)
1) Body: Min 0.4um Gold plating over min. 1.4um Nickel plating (Body: 镀金 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
3 Mechanical(机械性能):
1) Force: 70±20gf per pin at 1.0mm stroke (力:下压1.0mm的力:70±20gf)
130±30gf per pin at 2.0mm stroke (力:下压2.0mm的力:130±30gf)
2 Total stroke(总行程) : 2.10mm
3) Durability(寿命): 10,000 cycle min.
4 Electrical(电性能)
1) Contact Resistance(接触阻抗): 30mOhm Max
2) Voltage (额定电压): 36V DC Max
3) Current Rating(额定电流): 2.0A Max

LDC	-
DIST	-

NEW		2011/02/15
REVISION RECORD	APVD	DATE
L TR		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ±0.05		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME	PGGD PIN	HT TR	FIN
SCALE	PG-0.65-1.75-1.83-0.4-1.5-4.5-6.9	DWG NO.	—
1:1	A4	C-101479	—
SHEET 1 OF 1			
REV A			

101479-1
PART NUMBER

Top-Link
Electronics Ltd.

USED ON
—