




DIST

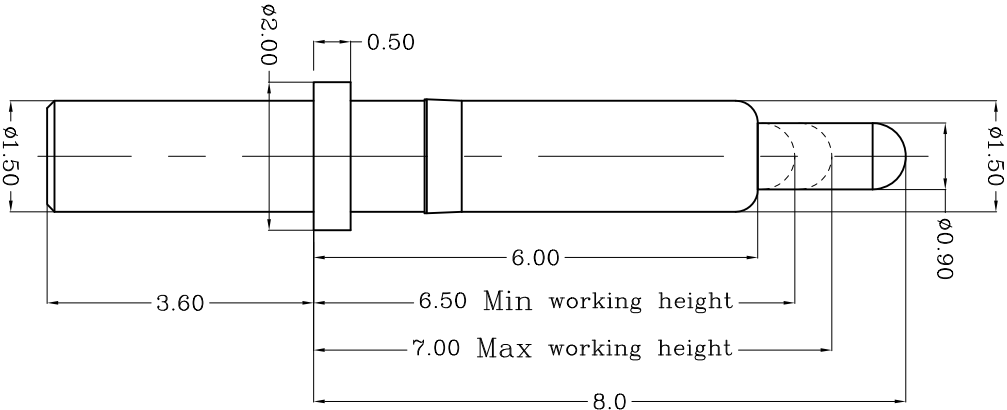

Rev.	NEW	2011/08/13
Revision record.		
Date.		

Table 1 Mechanical performance		
Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

- Not
- 1 Demnisions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than min working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.	
0.0 = ± 0.15		CHK:		REL:		
0.00 = ± 0.10		0.000 = ± 0.005				
Angle: ±1°		POGO PIN				
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX. DO NOT SCALE PRINT.						
Scale	1:1	Size	A4	DWG No.	C-101520	Page 1/1
Rev.	A					

Top-Link Electronics Ltd.

101520-1
PART NUMBER