




DWG NO.

C-101620

USED ON

—

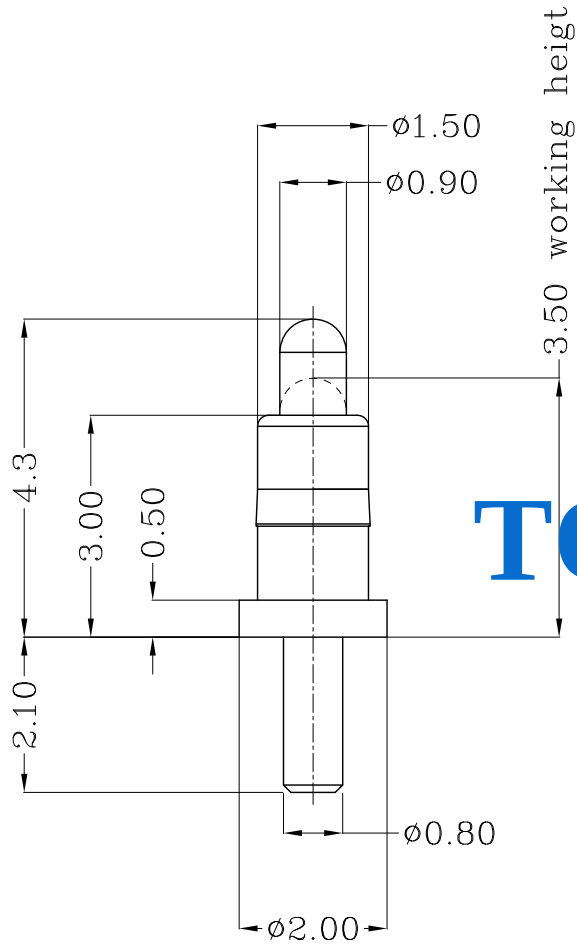

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical


1)Total stroke : 1.2mm

2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

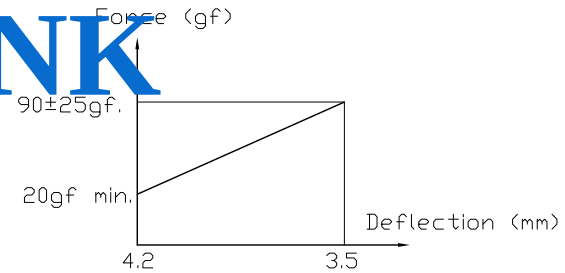

101620-1

PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±-
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL		1		HT TR		—		FIN		—		✓						
DWN		Qin		APVD		top-Link Electronics		Top-Link Electronics Ltd.										
CHK		REL																
NAME												POGO PIN						
X	SCALE		1:1		A4		DWG NO.		C-101620		SHEET		1 OF 1		REV		1	

LDC	—
DIST	—

LTR	REVISION RECORD	APVD	DATE
	NEW		120508