


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101642

proposal

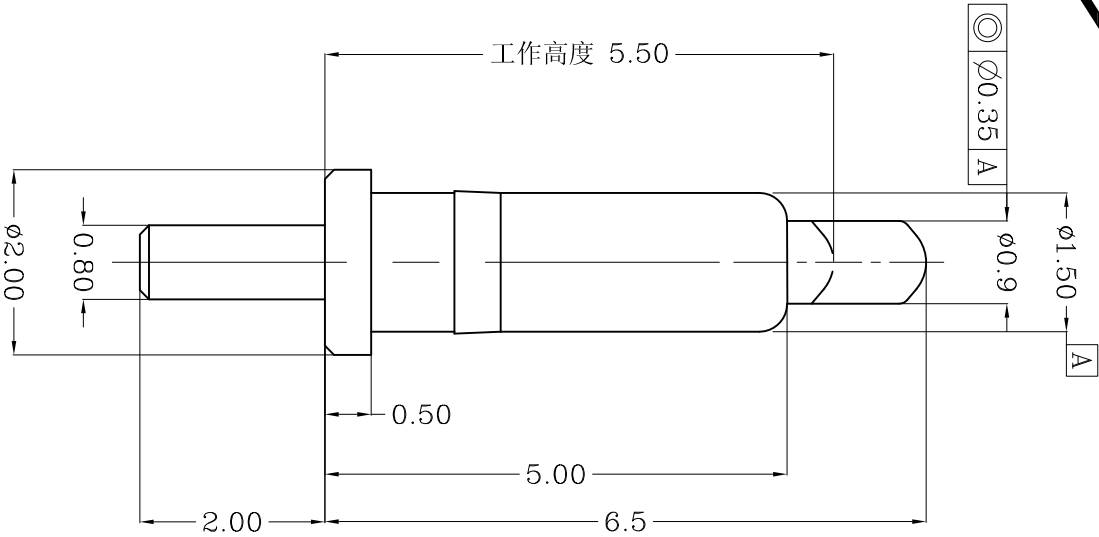


Table 1 Mechanical performance		
working height	5.50mm	90±25 gf
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP LINK

- Not
- 1 Demnnsions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> Side force is the average of forces obtained when plunger goes downwards and upwards.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.Current rating: 2.0A
 - 4 RoHS compliant.

Rev.	NEW	2012/06/18
Revision record.		
Date.		

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101642-1	
0.0 = ±0.15		DWN: Qin zuozhong	APVD:		Top-Link Electronics Ltd.	
0.00 = ±0.10		CHK: REL:				
0.000 = ±0.005		Angle: ±1°			Top-Link Electronics Ltd.	
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name POGO PIN				
Scale 1:1	Size A4	DWG No. C-101642	Page 1/1	Rev. B		