


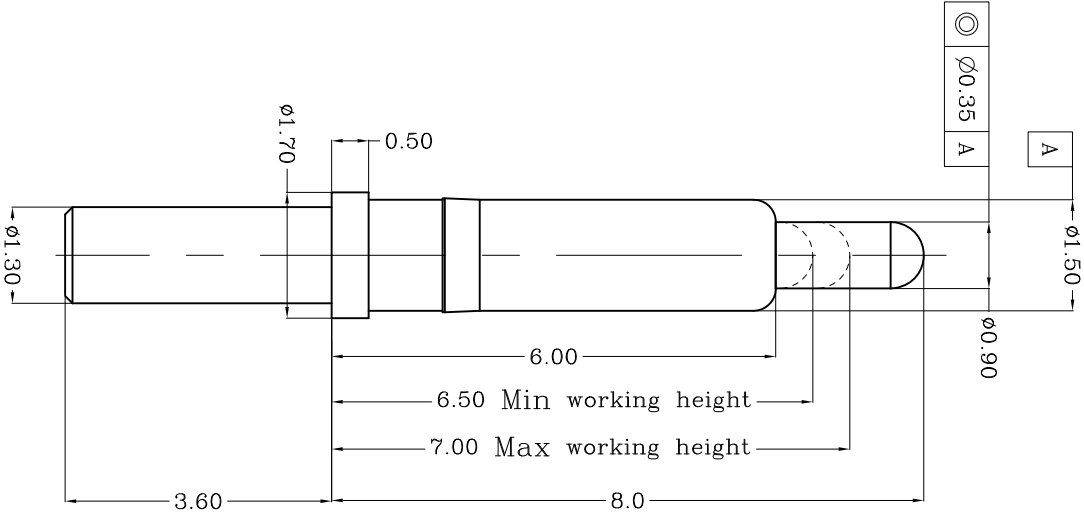

TOP LINK

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Warning: Working height are not permitted to be less than Min working height.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 2.0A

4 RoHS compliant.

Table 1 Mechanical performance		
Max working height	7.00mm	80gf min <2.1>
Min working height	6.50mm	200gf Max
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

	Update	2012/10/09
	NEW	2012/09/26
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit		Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm			
0.0	± 0.15	DWN:	APVD:			
0.00	± 0.10	CHK:	REL:			
0.000	± 0.05	Angle: ±1°	Name			
SURF. TEXTURE: REMOVE BURRS.		POGO PIN				
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.
		1:1	A4	C-101666	1/1	B