


proposal

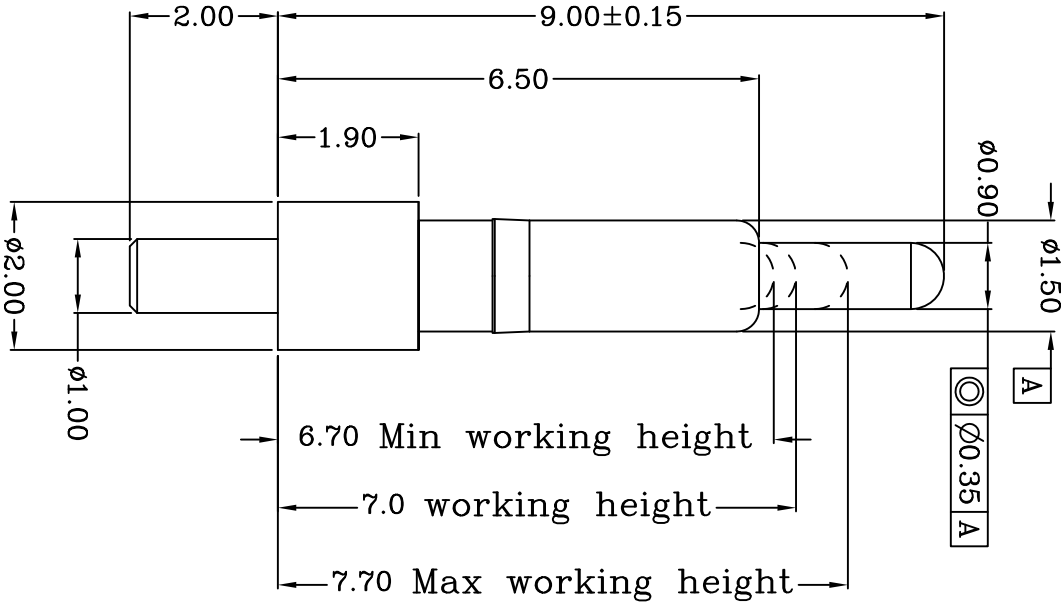

DIST

Rev.	NEW	2013/04/11
Revision record.		Date.

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Cai wonlu	APVD:		
0.0 = ± 0.15	CHK:		REL:		
0.00 = ± 0.10	NAME	POGO PIN	Scale	Size	DWG No.
0.000 = ± 0.05			1:1	A4	C-101718
Angle: ± 0.1					Page 1/1
SURF. TEXTURE:					Rev. 1
REMOVE BURRS.					
BREAK SHARP EDGES					
RO.05 MAX. DO NOT SCALE PRINT.					

101718-1
PART NUMBER

Table 1 Mechanical performance		
working height	7.00mm	85gf min
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	
4				
5				

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2> Warning: Working height are not permitted to be less than 6.70 working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

TOP LINK