

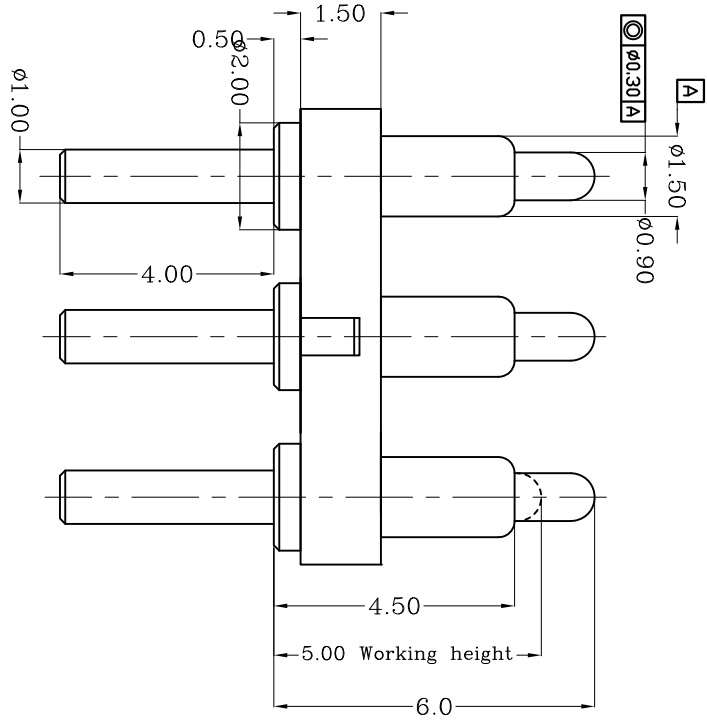


proposal

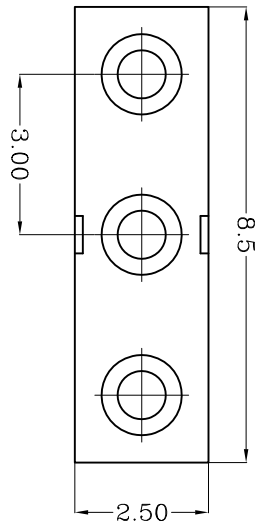

Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	3	Leaded Brass	Gold plating over Nickel plating
3	Plunger	3	Leaded Brass	Gold plating over Nickel plating
4	Spring	3	Stainless steel wire	_____
5				

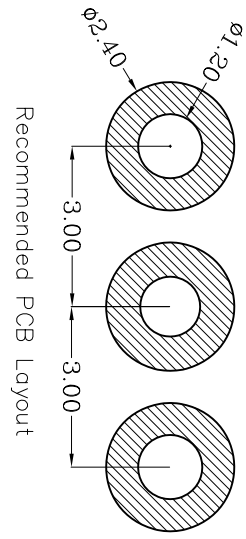

Working height	5.00mm	135±30gf <2.1>
Durability		10000cycle

TOP-LINK

- Notes
- Dimensions shall be interpreted per ASME Y14.5M.
 - Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - Electrical performance
Resistance: 30mOhm Max. Current rating: 2.0A
 - RoHS compliant.

Top-Link Electronics Ltd		Type	Customer drawing	Unit	mm	Weight	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin Zuozhong	APVD:			
0.0 = ±0.15	0.00 = ±0.10	CHK:	REL:				
0.000 = ±		Name		Customer drawing			
Angle: #1		Scale	1:1	Size	A4	DWG No.	C-110808
SURF TEXTURE:						Page	1/1
REMOVE SHARP EDGES						Rev.	1
BREAK MAX DO NOT SCALE PRINT.							

Top-Link
Electronics
Top-Link
Electronics Ltd.

110808-3
PART NUMBER

Rev.	NEW	2012/04/24
Revision record.		
Date.		

DIST
DWT
DST