
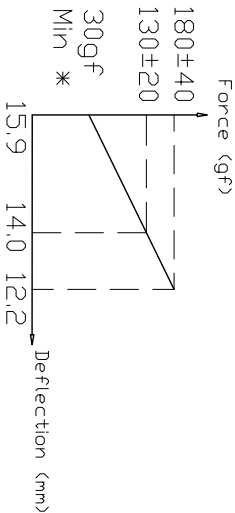


proposal

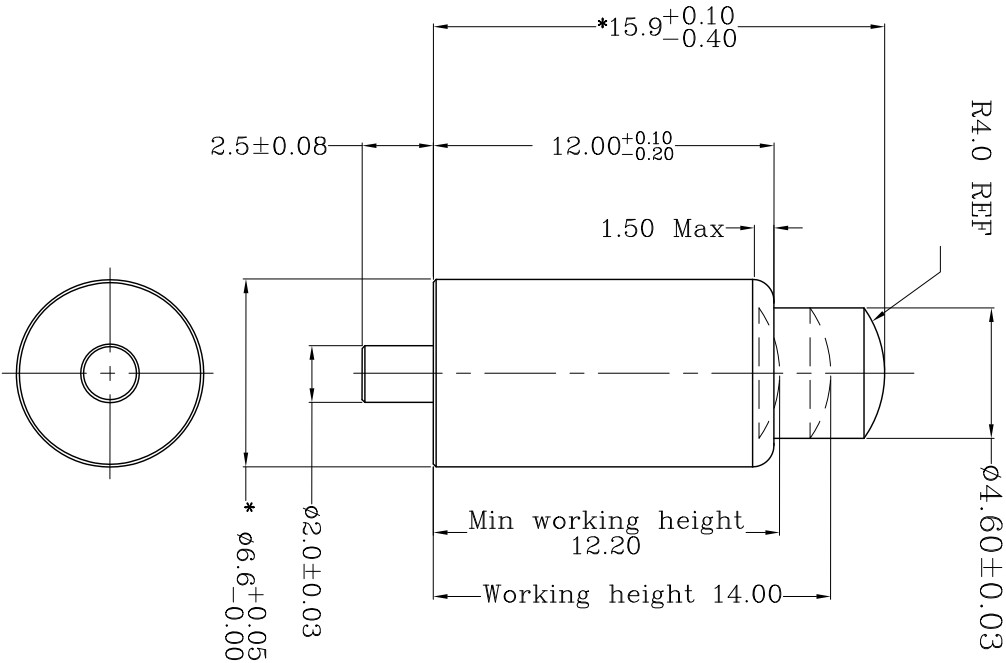

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- <2.3>Durability: 10,000 cycle min.
- 3 Electrical performance
- Resistance: 30 mΩ Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4	Spring holder	1	LCP	_____
5				

Top-Link Electronics Ltd.	Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	Minos	APVD:		
0.0 = ± 0.15	CHK:		REL:		
0.00 = ± 0.10	Name	POGO PIN			
0.000 = ± 0.005	Scale	1:1	Size	A4	DWG No.
Angle: ± 1°					C-20101010984
SURF. TEXTURE: REMOVE BURRS.					Page 1/1
BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.					Rev. 2

20101010984	PART NUMBER
-------------	-------------

Top-Link Electronics Ltd.