




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.







DWG NO.
C-100471

LDC	-
DIST	-

Notes:
1 Material, Housing: PA 4/6 (30% Glass Filled)
Color: Black.
Contact: Brass
2 Mechanical demands:
Plating Plunger: Min. 0.4um Au over 14um Ni
Plating Body: Min 0.1um Au over 14um Ni
Spring Force: 108±22 gr.

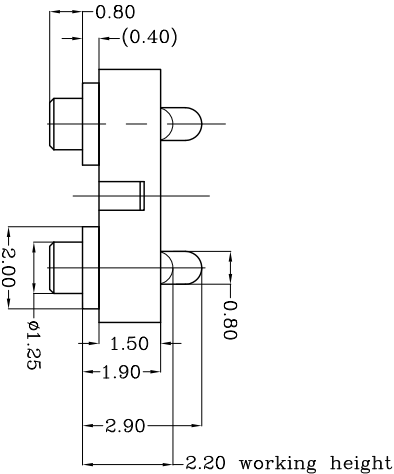

TOP-LINK

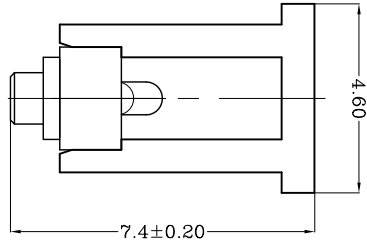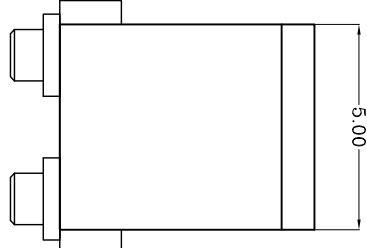

Recommended PCB Layout

DIMENSIONS IN MM		TOLERANCES UNLESS		OTHER SPECIFIED	
0	= ± -	0.0	= ± 0.15	0.00	= ± 0.10
0.000	= ± -	0.000	= ± -	0.000	= ± -
ANGLE: ±1°		SURF TEXTURE: 32/		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX	
DO NOT SCALE PRINT		SCALE 1:1		DWG NO. C-100471	
NAME BATTERY POGO CONNECTOR 2 POSITIONS		REL		SHEET 1 OF 1	
MATERIAL		HT TR		FIN	
DWN qin		APVD Lansing		—	
CHK Jim		REL		—	
PART NUMBER		100471-2		REV A	

USED ON
—