



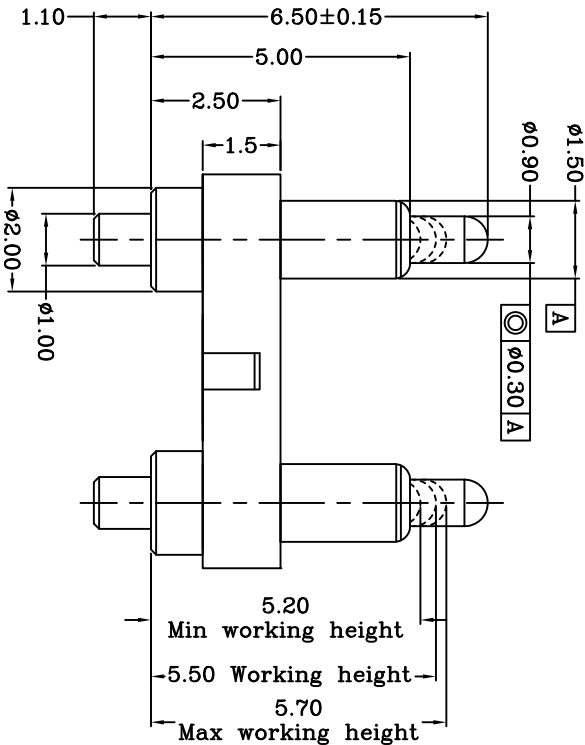


proposal

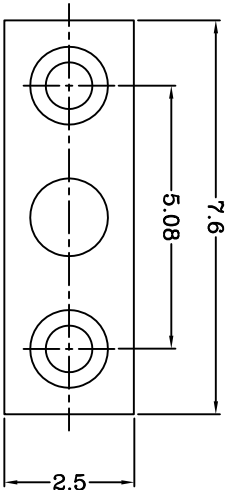

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- <2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 Packaging specification conforms to EIA 481
- 5 RoHS compliant.

TOP-LINK

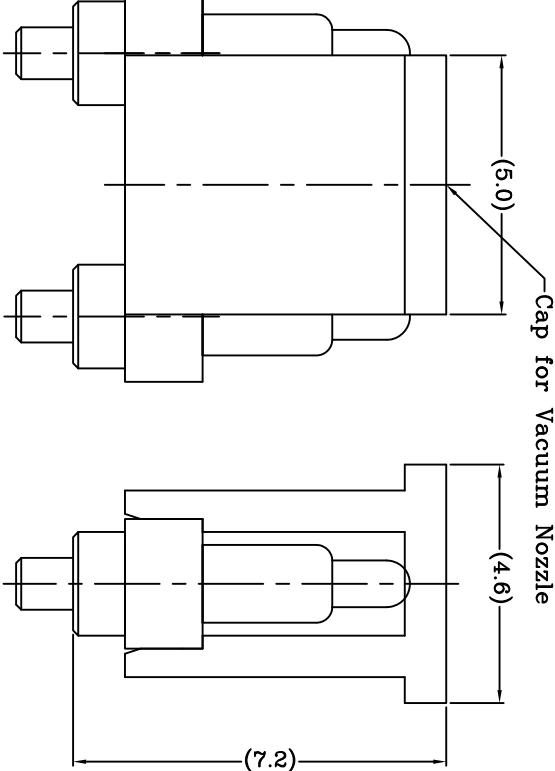

Item	Part name	Q'ty/Ed	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Min Au 0.1um over min Ni 1.4um
3	Plunger	2	Leaded Brass	Min Au 0.4um over min Ni 1.4um
4	Spring	2	Stainless steel wire	_____
5	CAP	1	High temp.Plastic	_____

Table 1 Mechanical performance		
Working height	5.50mm	125±30gf
Durability	10000cycle	

10101021571

PART NUMBER

Top-Link Electronics Ltd	Type	Customer drawing	Unit	mm	Weight	_____
TOLERANCES UNLESS OTHER SPECIFIED	DWN:	APVD:	Top-Link Electronics Top-Link Electronics Ltd			
0.0 = ± 0.15	Cai wanlu	REL:				
0.00 = ± 0.10	CHK:	REL:				
0.000 = ± 0.05						
Angle: ±1°	Name					
SURF. TEXTURE:	Customer drawing					
REMOVE BURRS.						
BREAK SHARP EDGES						
R0.05 MAX.D0 NOT SCALE PRINT.	Scale	Size	DWG No.	Page	Rev.	
	1:1	A4	C-10101021571	1/1	1	

Top-Link Electronics Ltd.

Electronics Ltd.

Rev.	Revision record.	Date.
1	NEW	2016/02/19

DIST

DIST
