


DWG NO.
C-101461

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

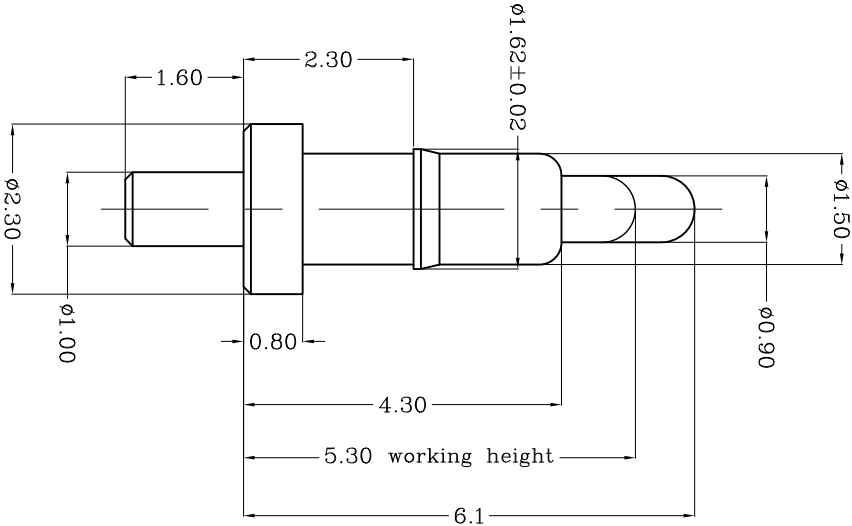

- Notes:
- 1) Material (材质):
 - 1) Body : Brass
 - 2) Plunger : Stainless steel wire
 - 2) Plating (电镀):
 - 1) Body : Min 0.1um Gold plating over min. 1.4um Nickel plating (镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
 - 3) Total stroke (总行程) : 1.50mm
 - 4) Durability (寿命): 10,000 cycle min.
 - 5) Electrical (电性能):
 - 1) Contact resistance (接触阻抗): 50mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

NEW			2010/11/08
REVISION			
RECORD			
APVD			
DATE			

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME		PGGD PIN	
SCALE		PG-1.0-1.6-2.3-0.8-1.5-4.3-6.1	
1:1		A4	
		DWG NO. C-101461	
		SHEET 1 OF 1	
		REV A1	

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	
TOP-LINK Electronics Ltd.		

101461-1
PART NUMBER

USED ON
-