
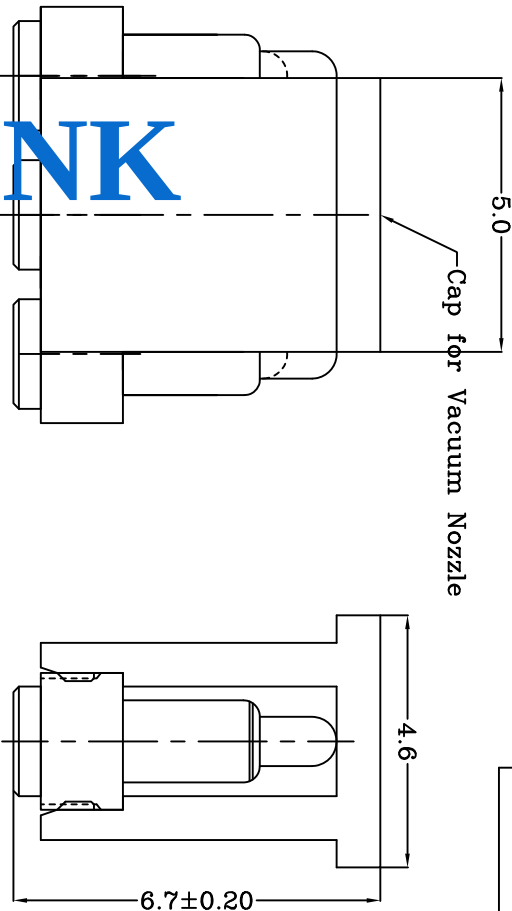
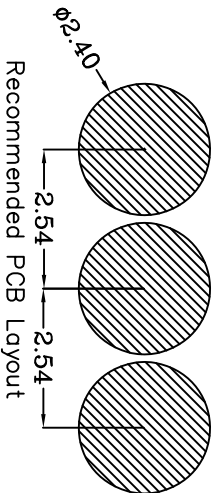
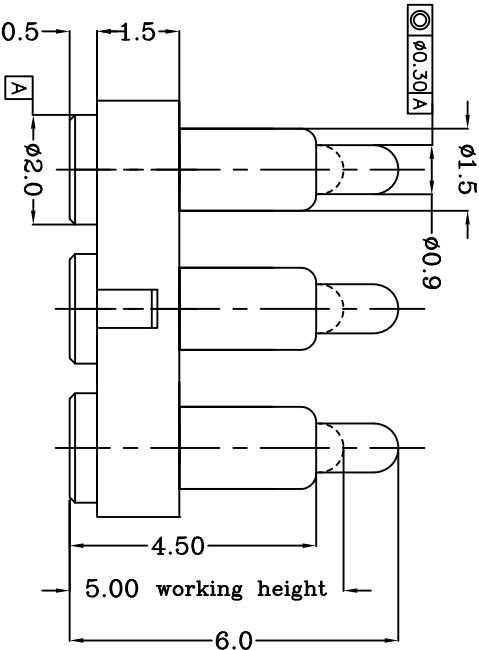


DWG NO.  
C-100635

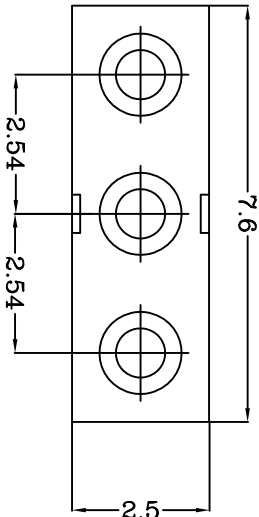

Notes:  
1 Material (材质):  
Housing: High temp. Plastic, UL94 V-0 Color Black.  
Plunger: Brass  
Spring: Stainless steel wire

2 Plating:  
1 Rocker: Min 0.1um Gold plating over min. 1.4um Nickel plating  
(Body: 镀金0.1um Min 镀底1.4um Min)  
2 Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating  
(Plunger: 镀金0.4um Min 镀底1.4um Min)

3 Mechanical:  
Total stroke (总行程): 1.40mm  
Durability (寿命): 10,000 cycle min.

4 Electrical (电性能)  
Contact resistance (接触阻抗): 30mOhm Max.  
Voltage rating (额定电压): 36V DC Max  
Current rating (额定电流): 2.0A

|      |   |
|------|---|
| LDC  | - |
| DIST | - |

|     |                 |      |            |
|-----|-----------------|------|------------|
| LTR | REVISION RECORD | APVD | DATE       |
|     | 增标同轴度           |      | 10/09/09   |
|     | NEW             |      | 2010/09/08 |

| DIMENSIONS IN MM                          |                                    |     |                      |
|-------------------------------------------|------------------------------------|-----|----------------------|
| TOLERANCES UNLESS OTHER SPECIFIED         |                                    |     |                      |
| 0                                         | = ±                                |     |                      |
| 0.0                                       | = ±0.15                            |     |                      |
| 0.00                                      | = ±0.10                            |     |                      |
| 0.000                                     | = ±                                |     |                      |
| ANGLE: ±1°                                |                                    |     |                      |
| SURF TEXTURE: 32/                         |                                    |     |                      |
| REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX |                                    |     |                      |
| DD NOT SCALE PRINT                        |                                    |     |                      |
| MATL                                      | HT TR                              | FIN |                      |
| DWN                                       | APVD                               |     |                      |
| QIN                                       | REL                                |     |                      |
| CHK                                       |                                    |     |                      |
| NAME                                      | BATTERY POGO CONNECTOR 3 POSITIONS |     |                      |
| SCALE                                     | 1:1                                | A4  | DWG NO.              |
|                                           |                                    |     | C-100635             |
|                                           |                                    |     | PGC-15-60-R-3P-254PH |
|                                           |                                    |     | SHEET 1 OF 1         |
|                                           |                                    |     | REV A                |

|             |
|-------------|
| 100635-3    |
| PART NUMBER |

USED ON  
-